


August 3, 2015

From: SPS+ Architects
8681 East Via de Negocio
Scottsdale, AZ 85258-3330

To: All Bidders, Suppliers and Other Interested Parties

Subject: **ADDENDUM NO. 4**

Project: GANADO UNIFIED SCHOOL DISTRICT 20
GANADO HIGH SCHOOL NEW ROOFING
SPS+ ARCHITECTS PROJECT NO. 1409A
BID #: IFB-16-27-16

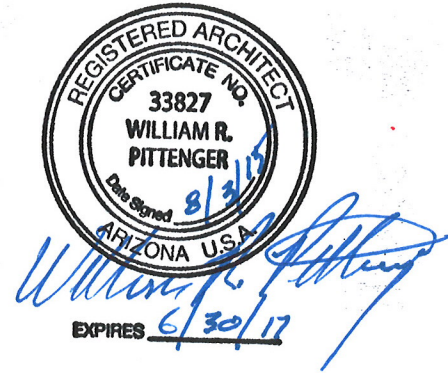

Bid Date: Bids will be received until 1:00 P.M., Local time Thursday August 6, 2015 at the Business Office of Ganado Unified School District 20

With reference to the Plans and Specifications for the above-designated project, which are in your possession for the purpose of preparing a Proposal, please note the following information, all of which is hereby made a part of the Contract Documents. This addendum supersedes all previous information.

SPECIFICATION:

Item 1. Section 07 5213 – (APP) Modified Bituminous Membrane Roof System:

- A. Revise paragraph 2.1.C.1. to read, "Polyisocyanurate roof insulation PRS Derbiboard CA: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.
- B. Revise paragraph 2.1.D.1. to read, "Polyisocyanurate roof insulation PRS Derbiboard CA: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.

Item 2. Section 07 5214 – (APP) Modified Bituminous Membrane Roof System:

- A. Revise paragraph 2.1.C.1. to read, "Polyisocyanurate roof insulation JM Enrgy 3: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.
- B. Revise paragraph 2.1.D.1. to read, "Polyisocyanurate roof insulation JM Enrgy 3: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.

Item 3. Section 07 5215 – (APP) Modified Bituminous Membrane Roof System:

- A. Revise paragraph 2.1.C.1. to read, "Polyisocyanurate roof insulation JM Enrgy 3 or PRS Derbiboard CA: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.
- B. Revise paragraph 2.1.D.1. to read, "Polyisocyanurate roof insulation JM Enrgy 3 or PRS Derbiboard CA: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.

ADDENDUM NO. 4
GANADO UNIFIED SCHOOL DISTRICT 20
GANADO HIGH SCHOOL NEW ROOFING
SPS+ Architects Project No. 1409A
August 3, 2015

Item 4. Section 07 5216 – (APP) Modified Bituminous Membrane Roof System:

- A. Revise paragraph 2.1.C.1. to read, "Polyisocyanurate roof insulation, Polytherm: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.
- B. Revise paragraph 2.1.D.1. to read, "Polyisocyanurate roof insulation, Polytherm: ASTM C-1289, Type II, Class 2, Grade 2 glass fiber rigid board, top surface coated with Cementitious Fiberglass Mat.

DRAWINGS:

Item 1. Sheet A101:

- A. Add the following to the Roof Drain De-icing System Specification: "De-icing cable shall extend four feet down (4'), measured from inlet rim elevation, into roof drain leaders and overflow drain leaders then loop back up."

PLEASE ACKNOWLEDGE RECEIPT OF THIS ADDENDUM NO. 4 IN THE SPACE PROVIDED ON THE BID FORM.

- END -